

(12) UK Patent Application (19) GB (11) 2 348 847 (13) A

(43) Date of Printing by UK Office 18.10.2000

(21) Application No 0018459.8

(22) Date of Filing 29.11.1999

(30) Priority Data

(31) 10342205 (32) 01.12.1998 (33) JP

(86) International Application Data

PCT/JP99/06652 Jp 29.11.1999

(87) International Publication Data

WO00/32288 Jp 08.06.2000

(71) Applicant(s)

Takara Co Ltd
(Incorporated in Japan)
No 19-16,4-chome, Aoto Katsushika-ku, Tokyo, Japan

(72) Inventor(s)

Kazuo Ohba
Takahiro Ueno

(51) INT CL⁷

A63H 3/36 , B29C 49/00 49/28 49/48

(52) UK CL (Edition R)

B5A AD34 AMC AT15P A1R314C1C A1R314C4
A1R314C5 A1R314C6 A1R322 A1R448 A2A4X A2E4H
A2E8 A2L A20T15

(56) Documents Cited by ISA

JP 640007795 B JP 100192556 A JP 040075809 B
JP 040008073 B

(58) Field of Search by ISA

INT CL⁷ A63H 3/36 9/00
Jitsuyo Shinan Koho 1922-1996 Toroku Jitsuyo
Shinan Koho 1994-2000 Kokai Jitsuyo Shinan Koho
1971-2000 Jitsuyo Shinan Toroku Koho 1996-2000


(74) Agent and/or Address for Service

Reddie & Grose
16 Theobalds Road, LONDON, WC1X 8PL,
United Kingdom

(54) Abstract Title

Method of molding elastic doll heads and mold therefor

(57) A method of molding doll heads faithfully to a mold by blow molding using a safe molding material, and a mold therefor. A split mold (2, 3) formed with an inner surface shape conforming to the shape of a doll head (17) is used such that a parting line (18) resulting from the split mold (2, 3) is positioned at or in the vicinity of the hairline of the doll head (17). The molding material, which contains synthetic resin thermoplastic elastomer used as the main ingredient, with a plasticizer and a coloring agent added thereto, is heated and the parison (15) is fed into between the split mold halves (2, 3) disposed apart from each other, whereupon the split mold halves (2, 3) are closed and air is blown therein. When air is blown into the split mold (2, 3), the air in the cavity is removed through at least one place on a protruding portion such as the nose (5).

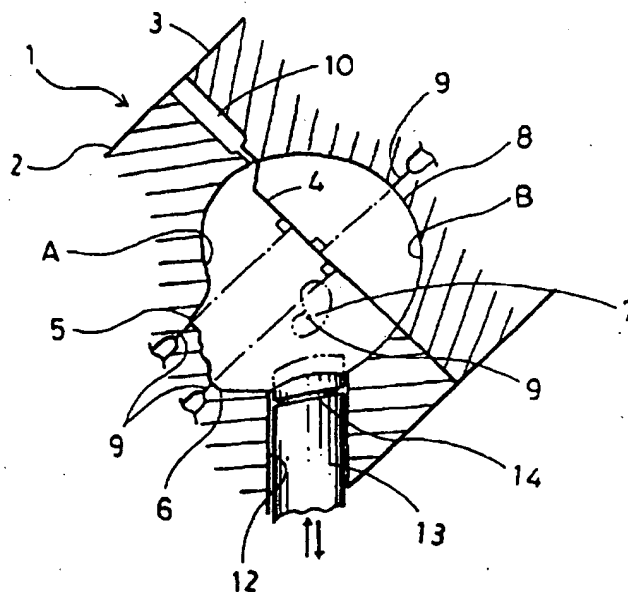

BEST AVAILABLE COPY

GB 2 348 847 A

FIG. 3

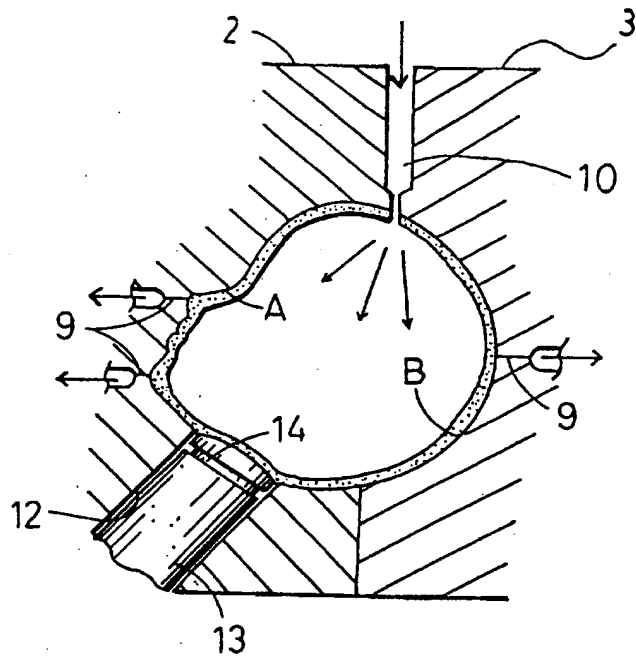


FIG. 4

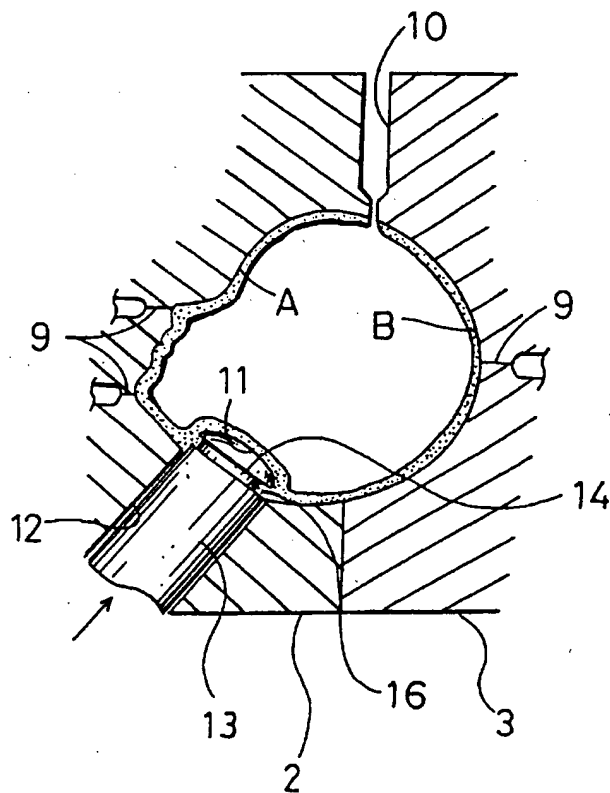


FIG. 5A

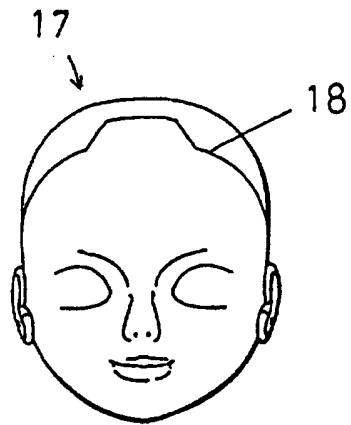


FIG. 5B


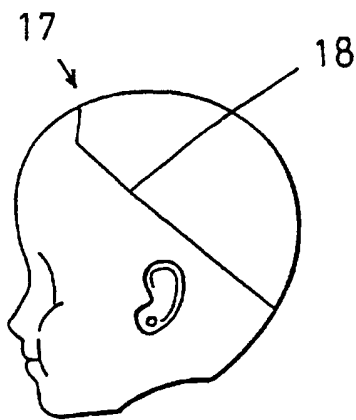


FIG. 6

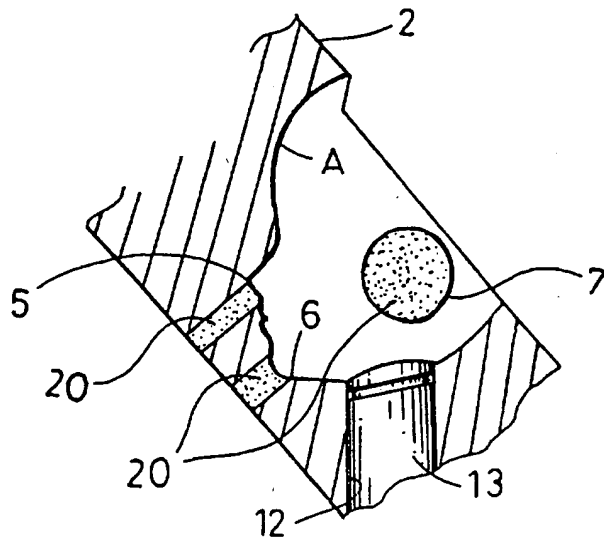

BEST AVAILABLE COPY

FIG. 7A


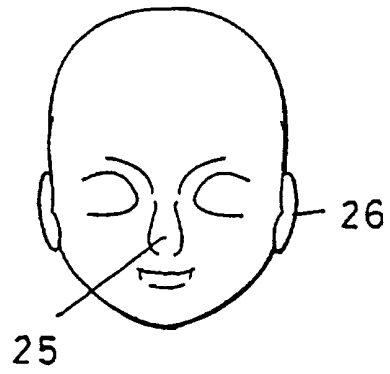


FIG. 7B

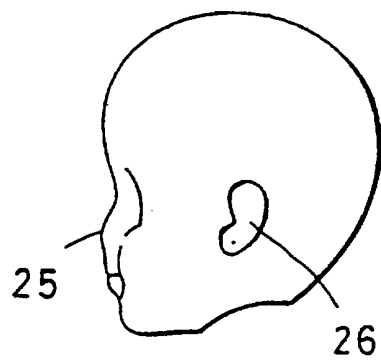

PATENT OFFICE - DEFINITIVE COPY

DESCRIPTION

METHOD FOR MOLDING ELASTIC HEAD FOR DOLL AND MOLD THEREFOR

5 Technical Field

This invention relates to a method for molding an elastic head for a doll and a mold therefor.

Background Art

10 Conventionally, an elastic head for a doll has been generally formed of molten vinyl chloride by slush molding or rotational molding. Both slush molding and rotational molding prevent formation of such a parting line as seen in a molded doll head made by blow molding, to thereby provide a molded article
15 satisfactorily finished. Also, rotational molding has the advantage of enabling mass production of the head at a low cost.

Vinyl chloride contains chlorine and the above-described molding techniques require to add phthalate ester acting as a plasticizer to vinyl chloride in order to provide a molded
20 article with elasticity or resiliency. Recently, safety of vinyl chloride and phthalate ester has been considered to be problematic, thus, use of vinyl chloride tends to be avoided in various fields. This is likewise true of a doll head, thus, it is required that the head be formed of a safe molding material.

25 However, molding of a molding material other than vinyl chloride by slush molding or rotational molding is substantially impossible because the material fails to be gelled. Blow molding permits molding of the material, however, it fails to prevent formation of a parting line on a surface of a molded head. Also,
30 it fails to permit the molding material to be satisfactorily distributed to fine uneven portions such as eyes of the doll head, its nose, its mouth and the like, so that there is a possibility of failing to mold the head exactly in conformity to a configuration of a mold. In manufacturing of a doll head,

satisfactory finishing of a surface of a face of the head such as increased smoothness of the surface and enhanced elaborateness of unevenness of various parts of the face are absolute requirements. The conventional blow molding techniques fully
5 fails to meet both requirements.

Also, a head for a doll is required to exhibit elasticity which permits the head to have a soft feel like the human skin. Thus, the head must meet such a requirement.

The present invention has been made so as to solve the
10 above-described problem of the prior art. Accordingly, it is an object of the present invention to provide a method for forming a doll head and a mold therefor which is capable of employing a molding material other than vinyl chloride and forming the head exactly conforming or corresponding to a configuration of a mold
15 by blow molding as well as permitting the doll head to exhibit elasticity.

Disclosure of Invention

In order to solve the above-described problem of the
20 prior art, in accordance with the present invention, a method for molding a head for a doll is provided. The method is characterized in that the method comprises the steps of: providing a split mold having an inner surface formed to have a configuration conforming to a shape of the head of the doll, the
25 split mold having a parting line formed on a hairline of the hair of the head or in proximity thereto; heating a parison constituted by a molding material which mainly consists of one of a thermoplastic synthetic resin elastomer and silicone resin and which has a plasticizer and a coloring agent added thereto,
30 dropping in the parison between mold members of the split mold kept spaced from each other, then joining the mold members of the split mold together, and blowing air into the split mold thus joined; removing air from a cavity defined in the split mold through at least one of projections formed on the inner surface

of the split mold when air is blown into the split mold; and separating the mold members of the split mold from each other to remove a molded article therefrom.

5 Such construction of the method of the present invention effectively prevents the parting line from appearing on a face which is the most important portion of the doll head. The parting line is defined on a hairline of the hair of the head or in proximity thereto. The head is covered with hair embedded on the head or a wig, so that the parting line may be prevented from
10 being viewed from the outside or outwardly exposed. In the prior art, a post-treatment of a parting line formed on an elastic molded article is manually carried out, resulting in the molding being highly troublesome. The present invention eliminates such a troublesome treatment, so that the head may be manufactured
15 with increased efficiency.

Further, in the present invention, air is removed from the cavity in the split mold through an air vent hole formed in at least one of the projections, such as a nose or the like, of the split mold substantially concurrently with blowing of air
20 which is carried out during the molding, to thereby ensure that the molding material is satisfactorily fed or distributed to the projections. Thus, portions of the head corresponding to the projections are each permitted to be formed to have a distinct shape exactly conforming to a configuration of the mold.

25 In addition, the molding material is constituted by a synthetic resin elastomer or silicone resin, resulting in it being free of vinyl chloride, so that the present invention may provide a non-toxic and safe doll head which does not lead to environmental pollution and which is harmless to health of the
30 human body. Also, the doll head is permitted to exhibit elasticity and have a soft feel like the human skin, resulting in a doll particularly suitably used as an instrument which permits infants and children to gain pseudo-experience in play being provided.

Moreover, the molded article is elastic, to thereby be readily smoothly removed from the mold, resulting in damages to undercuts of the head such as a nose, a chin or the like being prevented.

5 It is preferable that the split mold be formed at a portion thereof corresponding to a neck of the doll with a rod so as to be retractably advanced into the cavity, so that the rod is advanced into the cavity after blowing air and is retracted or retreated from the cavity before the mold members of the split
10 mold are separated from each other, resulting in a neck hole being formed. Such construction prevents the neck hole from damaging the remaining part of the head, because the neck hole is formed by advancing the rod into the cavity of the split mold after air is blown into the cavity during the molding to expand
15 the parison.

Removal of air from the cavity is desirably carried out through a fine air vent hole formed through the projection of the split mold. Alternatively, removal of air from the cavity may be carried out via a bar-like porous element inserted through the
20 split mold.

In accordance with another aspect of the present invention, a mold for molding a head for a doll is provided. The mold is characterized in that the mold comprises: two split mold members of which one has an inner surface formed to have a
25 configuration conforming to a shape of a face of the doll and the other has an inner surface formed to have a configuration conforming to a shape of a rear and side head portion of the doll, the split mold members having a parting line formed on a hairline of the hair of the head or in proximity thereto; one of
30 the split mold members being formed at at least one of projections provided on the inner surface with an air vent means which permits air in a cavity in the split mold members to be removed therethrough when air is blown into the split mold members.

The mold thus constructed positively realizes satisfactory practicing of the above-described molding method by blow molding, so that a doll head may be formed to have a sharp configuration substantially equal to that conventionally obtained by slush molding or rotating molding. Also, one of the split mold members has the inner surface formed to have a configuration conforming to the shape of the face of the doll and the other mold member has the inner surface formed to have a configuration conforming to the shape of the rear and side head portion of the doll. This prevents a parting line from appearing on the face which is the most important portion of the doll head.

The split mold members preferably have a rod for formation of a neck hole arranged at a portion thereof corresponding to a neck of the doll in a manner to be retractably advanced into the cavity. The arrangement of the rod ensures formation of the neck hole without damaging the remaining part of the doll head. Also, the rod is preferably formed on a peripheral surface of a distal end thereof with a ring-like groove. The ring-like groove thus formed permits a peripheral surface of the neck hole of the molded doll head to be formed with an annular projection, which effectively functions to prevent a neck portion of a body of the doll fitted in the neck hole from being detached from the neck hole.

The air vent means is preferably constituted by an air vent hole formed through the split mold member and the air vent hole is preferably formed to have a diameter of from 0.1 mm to 0.3 mm. Alternatively, the air vent means may be constituted by a bar-like porous element inserted through the split mold member. In this instance, the porous element desirably has pores formed to have a diameter of from 0.03 mm to 0.1 mm. Such construction permits air in the cavity forced out due to expansion of the parison by blowing air during the molding to be naturally removed to the outside from the air vent means, so that the doll head may be formed to have a shape exactly corresponding to the inner

configuration of the mold without forcible removal of the air. Also, the air vent hole or pores for air removal are formed to have a sufficiently small diameter, to thereby prevent ingress of the molding material into the air vent hole or pores during the molding, resulting in a trimming operation after the molding being eliminated.

Brief Description of Drawings

Fig. 1 is a sectional view showing an embodiment of a mold for molding a doll head according to the present invention.

Fig. 2 is a sectional view showing the mold kept open in a molding method according to the present invention.

Fig. 3 is a sectional view showing the mold having air blown thereinto.

Fig. 4 is a sectional view showing formation of a neck hole.

Fig. 5A is a front elevation view showing a molded doll head and Fig. 5B is a side elevation view thereof.

Fig. 6 is a sectional view showing another embodiment of a mold for molding a doll head according to the present invention.

Fig. 7A is a front elevation view showing a doll head formed by blow molding at the experimental stage and Fig. 7B is a side elevation view thereof.

Best Modes for Carrying out Invention

First, a doll head was manufactured by blow molding by way of trial in order to further study the above-described problems encountered in blow molding conventionally carried out. As a result, it was found that blow molding, as shown in Figs. 7A and 7B, causes a nose 25 and ears 26 to be rounded. In particular, it was found that a configuration of each of a tip of the nose 25 and nares lacks sharpness, thus, blow molding causes a problem of failing to permit a molding material to be fully

distributed throughout a mold. Also, it was found that a whole surface of a doll head is not necessarily exposed and a parting line may be disregarded by adopting a suitable measure.

5 The inventors have developed a method for molding a doll head by blow molding and a mold for practicing the method while taking notice of the above-described fact. The details thereof will be described hereinafter.

10 In Fig. 1, reference numeral 1 designates a mold. The mold 1 is applied to blow molding and constituted by two split mold members 2 and 3. One of the split mold members 2 has an inner surface formed to have a configuration A conforming or corresponding to a face of a doll and the other split mold member 3 has an inner surface formed to have a configuration B conforming or corresponding to a portion of a head of the doll other than the face. The term "portion of head other than face" used herein indicates a portion of the head including a vertex, an occiput and a part of a temple and is referred to as "rear and side head portion" herein. Also, the split mold members 2 and 3 are so constructed that a mating surface 4 is defined on a hairline of the hair on the doll head or in proximity thereto so as to prevent a parting line from appearing on the face of the doll. The split mold members 2 and 3 are provided with projections constituting a nose 5, a chin 6, ears 7 and an occiput 8, respectively. The projections are each formed therein with an air vent hole 9. The air vent hole 9 is preferably formed to have a diameter of between 0.1 mm and 0.3 mm. The air vent holes 9 in the nose 5, chin 6 and occiput 8 are each formed so as to be perpendicular to the mating surface 4 of the split mold members 2 and 3. Also, the air vent hole 9 in each of the ears 7 is formed so as to be perpendicular to a surface (not shown) which is defined at a center as viewed from a front. An air blowing hole 10 is formed at a portion of the mating surface 4 positioned at an uppermost portion of the head.

In the illustrated embodiment, the air vent holes 9 for

air removal are provided in the projections of the split mold members 2 and 3. However, it is merely required that the air vent hole 9 be provided at at least one location. In general, the air vent holes are preferably provided in the nose 5 and ears 7. In particular, the air vent hole 9 is more preferably arranged in the nose 5, although it is not limited to such arrangement. The term "projections" used herein indicate not only portions outwardly projecting from a surface of the head such as the nose 5, chin 6 and ears 7 but non-recessed portions or outwardly convex portions such as lips, cheeks, a forehead and the like. Thus, the projections further include portions positioned away from the mating surface 4 of the split mold members 2 and 3, which portions permit air to be apt remain therein, such as portions of the occiput 8 and chin 6 at which the air vent holes 9 are arranged.

Also, the one split mold member 2 described above is formed in a portion thereof corresponding to a neck of the doll with a through-hole 12, which has a rod 13 slidably arranged therein so as to be retractably advanced into a cavity of the mold 1. The rod 13 is formed on a peripheral surface of a distal end thereof with a ring-like groove 14. The rod 13 may be arranged so as to be actuated through any suitable means (not shown) such as an air cylinder unit, a hydraulic cylinder unit or the like arranged outside the mold 1.

Now, manufacturing of the doll head by the mold 1 thus constructed will be described.

First of all, a molding material is provided, which mainly consists of a thermoplastic synthetic resin elastomer because the doll head which is a molded article is required to exhibit soft elasticity like the human skin. The molding material also contains a plasticizer, a coloring agent and the like added to the elastomer. The thermoplastic elastomers include an olefin elastomer, a styrene elastomer, a styrene-butadiene elastomer, an urethane elastomer, a polyester

elastomer, a polyethylene elastomer and the like. Such a thermoplastic elastomer is kept from such gelation as encountered in vinyl chloride when a plasticizer is added thereto, but can be used as a molding material for blow molding. Also, such a thermoplastic elastomer permits a variety of plasticizers to be used for the molding material. Thus, the present invention excludes incorporation of any chlorine elastomer into the molding material. Also, the present invention keeps phthalate ester from being used as a plasticizer for the molding material. In the illustrated embodiment, a material which is commercially available under a tradename "Septone" from KURARAY CO., LTD. may be used as the molding material. In addition to the elastomer described above, silicone resin may be used as the molding material.

Then, a cylindrical parison 15 formed of the above-described molding material is heated and then dropped in between the split mold members 2 and 3 arranged so as to be spaced from each other as shown in Fig. 2. Then, as shown in Fig. 3, the split mold members 2 and 3 are joined to each other and then air is blown into the thus-joined split mold members 2 and 3 through the air blowing hole 10.

The molding material is heated to a temperature of between 210°C and 220°C and the above-described blowing of air is carried out under a pressure of between 4 kgf/cm² and 6 kgf/cm². The blowing of air permits expansion of the parison 15, so that the parison 15 may be stuck on the inner surfaces of the split mold members 2 and 3. The heating temperature of between 210°C and 220°C to which the molding material is heated permits the parison 15 to be uniformly expanded. Air initially present in the cavity partially remains between the parison 15 and the inner surfaces of the split mold members 2 and 3. Thus, the residual air is outwardly removed through the air vent holes 9 substantially concurrently with the blowing air described above. This prevents the residual air from forming a kind of a wall, to

thereby ensure that the molding material is satisfactorily distributed throughout the inner surface of the mold 1.

Then, as shown in Fig. 4, the rod 13 is advanced into the cavity after blowing air and then the rod 13 is retracted or
5 retreated from the mold 1 before the split mold members 2 and 3 are released or separated from each other. Ingress or advancing of the rod 13 into the cavity permits the molding material in the split mold member 2 to be partially pushed into the interior of the split mold member 2, resulting in a neck hole 11 being
10 formed. When the rod 13 is then retreated from the cavity, a projected ring 16 is formed on a peripheral surface of the neck hole 11.

When the split mold members 2 and 3 are separated from each other after retreat of the rod 13 from the cavity, a molded
15 article is removed from the split mold members 2 and 3, to thereby drop, so that an elastic head 17 for a doll as shown in Figs. 5A and 5B may be obtained. In this instance, a parting line 18 is defined along a hairline of the hair as shown in Figs. 5A and 5B.

20 Thus, the doll head molding method described above prevents the parting line from appearing on the face of the doll head which is the most important portion of the doll head 17 because the one split mold member 2 is formed on the inner surface thereof with a configuration conforming to the face of the doll and the other split mold member 3 is formed on the inner
25 surface thereof with a configuration conforming to the rear and side head portion of the head.

The parting line 18 is formed on the portion of the doll head in proximity to the hairline of the hair. However, the rear
30 and side head portion of the doll head is covered with hair embedded on the head or a wig, to thereby keep the parting line 18 from being exposed at a position which is visible from outside. This eliminates a necessity of subjecting the parting line 18 to any post-treatment and renders the parting line 18

negligible.

Air is removed from the split mold members 2 and 3 through the air vent holes 9 formed in the portions thereof corresponding to the nose 5, chin 6, ears 7 and occiput 8 of the doll head substantially simultaneously with blowing air during the molding, to thereby ensure that the molding material may be satisfactorily distributed to these portions. This permits the doll head molded to have a tip of a nose, nares and conchae each of which is formed to have a sharp configuration in exact conformity to a configuration of the mold. In addition, the air vent holes 9 are each formed to have a diameter as small as 0.1 mm to 0.3 mm which fully prevents the molding material from entering the air vent holes 9, resulting in the molded article or doll head being kept from being formed thereon with any unnecessary portion like a whisker. Thus, the illustrated embodiment eliminates a post-treatment of trimming or removing any unnecessary fine portion. For manufacturing of a doll head of about 40 mm in height and about 30 mm in width, the air vent holes 9 are each most preferably formed to have a diameter of about 0.2 mm. The unnecessary portion having a size of 0.3 mm or more facilitates the post-treatment; so that when a doll head increased in size is to be molded, the air vent holes 9 may be formed to have a diameter larger than 3 mm, to thereby form a large unnecessary portion, which is then readily removed or trimmed.

Most of the air vent holes 9 are formed so as to be perpendicular to the mating surface 4 of the split mold members 2 and 3, resulting in removal of air from the mold 1 being efficiently carried out. However, the present invention is not limited to such a configuration.

The illustrated embodiment is so constructed that the rod 13 is moved via the cylindrical through-hole 12 of the split mold member 2 after expansion of the parison 15 by blowing air during the molding, to thereby form the neck hole 11. Such construction

effectively prevents the neck hole 11 from damaging or interfering with forming of the remaining part of the doll head. On the contrary, the molding carried out while keeping the rod 13 initially projected into the cavity of the mold 1 possibly causes the rod 13 to interfere with distribution of the molding material throughout the mold, to thereby prevent the molding material from being fully distributed to portions corresponding to a chin of the doll head and the like.

The rod 13, as described above, is formed on the peripheral surface of the distal end thereof with the ring-like groove 14, to thereby permit the annular projection 16 to be formed on the peripheral surface of the neck hole 11 of the doll head 17. Such construction, when a neck portion formed on the body of the doll is fitted in the neck hole 11, prevents the neck portion from being detached from the neck hole 11. The term "ring-like" used in connection with the ring-like groove 14 covers "helical".

Removal of residual air from the cavity of the mold is not limited to that carried out through the fine air vent holes 9 formed through the split mold members 2 and 3. More specifically, as shown in Fig. 6, the illustrated embodiment may be constructed in such a manner that bar-like porous elements 20 are arranged so as to be inserted through the split mold member 2(3) and have end surfaces thereof, which face the cavity, formed to have the respective shapes corresponding to the nose 5 and ears 7. The porous elements 20 each preferably have pores formed to have a diameter within a range of between 0.03 mm and 0.1 mm.

The above-described construction of the illustrated embodiment permits air forced out due to expansion of the parison 15 by blowing air during the molding to be naturally discharged through the porous elements 20 to the outside, to thereby prevent formation of a wall by residual air, so that a molded article or doll head which is formed to have a configuration exactly conforming to the mold and exhibits sufficient elasticity may be

obtained. Alternatively, the residual air may be forcibly evacuated from the cavity through the porous elements 20.

CLAIMS

1. A method for molding an elastic head for a doll, characterized in that the method comprises the steps of:

providing a split mold having an inner surface formed to have a configuration conforming to a shape of the head of the doll, said split mold having a parting line formed on a hairline of the hair of the head or in proximity thereto;

heating a parison constituted by a molding material which mainly consists of one of a thermoplastic synthetic resin elastomer and silicone resin and which has a plasticizer and a coloring agent added thereto, dropping in the parison between mold members of said split mold kept spaced from each other, then joining said mold members of said split mold together, and blowing air into said split mold thus joined;

removing air from a cavity defined in said split mold through at least one of projections formed on said inner surface of said split mold when air is blown into said split mold; and

separating said mold members of said split mold from each other to remove a molded article therefrom.

2. A method for molding an elastic head for a doll as defined in claim 1, wherein said split mold is provided at a portion thereof corresponding to a neck of the doll with a rod so as to be retractably advanced into said cavity, further comprising the steps of advancing said rod into said cavity after blowing air and retracting said rod from said cavity before said mold members of said split mold are separated from each other, resulting in a neck hole being formed.

3. A method for molding an elastic head for a doll as defined in claim 1 or 2, wherein the removing of air from said cavity is carried out through a fine air vent hole formed through the projection of said split mold.

4. A method for molding an elastic head for a doll as defined in claim 1 or 2, wherein the removing of air from said cavity is carried out through a bar-like porous element inserted

through said split mold.

5. A mold for molding an elastic head for a doll, characterized in that the mold comprises:

two split mold members of which one has an inner surface formed to have a configuration conforming to a shape of a face of the doll and the other has an inner surface formed to have a configuration conforming to a shape of a rear and side head portion of the doll, said split mold members having a parting line formed on a hairline of the hair of the head or in proximity thereto;

one of said split mold members being formed at at least one of projections provided on said inner surface with an air vent means which permits air in a cavity in said split mold members to be removed therethrough when air is blown into said split mold members.

6. A mold for molding an elastic head for a doll as defined in claim 5, wherein said split mold members have a rod for formation of a neck hole arranged at a portion thereof corresponding to a neck of the doll in a manner to be retractably advanced into said cavity.

7. A mold for molding an elastic head for a doll as defined in claim 6, wherein said rod is formed on a peripheral surface of a distal end thereof with a ring-like groove.

8. A mold for molding an elastic head for a doll as defined in any one of claims 5 to 7, wherein said air vent means is constituted by an air vent hole formed through the split mold member.

9. A mold for molding an elastic head for a doll as defined in claim 8, wherein said air vent hole is formed to have a diameter of from 0.1 mm to 0.3 mm.

10. A mold for molding an elastic head for a doll as defined in any one of claims 5 to 7, wherein said air vent means is constituted by a bar-like porous element inserted through the split mold member.

11. A mold for molding an elastic head for a doll as defined in claim 10, wherein said porous element has pores formed to have a diameter of from 0.03 mm to 0.1 mm.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP99/06652

A. CLASSIFICATION OF SUBJECT MATTER
Int. Cl.⁷ A63H3/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
Int. Cl.⁷ A63H3/36, A63H9/00Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Jitsuyo Shinan Koho 1922-1996 Toroku Jitsuyo Shinan Koho 1994-2000
Kokai Jitsuyo Shinan Koho 1971-2000 Jitsuyo Shinan Toroku Koho 1996-2000

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT.

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	JP, 10-192556, A (Takuya Wada), 28 July, 1998 (28.07.98), Full text; Figs. 1 to 3 (Family: none) Full text; Figs. 1 to 3 (Family: none)	1, 2, 5-8 3, 4, 9-11
Y A	JP, 4-75809, B (Toyo Tire and Rubber Co., Ltd.), 01 December, 1992 (01.12.92), Full text; Figs. 1 to 6 (Family: none) Full text; Figs. 1 to 3 (Family: none)	1, 2, 5-8 3, 4, 9-11
Y A	JP, 4-8073, B (Kabushiki Kaisha Takara), 13 February, 1992 (13.02.92), Full text; Figs. 1 to 3 (Family: none) Full text; Figs. 1 to 3 (Family: none)	1, 2, 5-8 3, 4, 9-11
Y A	JP, 64-7795, B (Kabushiki Kaisha Takara), 10 February, 1989 (10.02.89), Full text; Figs. 1 to 6 (Family: none) Full text; Figs. 1 to 6 (Family: none)	1, 2, 5-8 3, 4, 9-11

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:
 "A" document defining the general state of the art which is not considered to be of particular relevance
 "E" earlier document but published on or after the international filing date
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
 "O" document referring to an oral disclosure, use, exhibition or other means
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
 "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
 "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
 "&" document member of the same patent family

Date of the actual completion of the international search
17 February, 2000 (17.02.00)Date of mailing of the international search report
29 February, 2000 (29.02.00)Name and mailing address of the ISA/
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

THIS PAGE BLANK (USPTO)